

Dane aktualne na dzień: 24-10-2020 16:51

Link do produktu: <https://www.isport.pl/rower-elektryczny-cannondale-moterra-3-2020-p-14617.html>




Rower Elektryczny Cannondale Moterra 3 2020

Cena	24 999,00 PLN
Dostępność	Zapytaj o dostępność
Numer katalogowy	C65320M10

Opis produktu

Rama:	160mm travel, BallisTec Carbon Front Triangle, SmartForm C1 Alloy Swingarm, Proportional Response Tuned Suspension, removable downtube battery, alloy skid plate, Ai offset drivetrain, internal cable routing, 148x12mm thru-axle, post mount brake, tapered headtube
Amortyzator przód:	RockShox 35 Gold RL, 160mm, DebonAir, 15x110, tapered steerer, 51mm offset
Amortyzator tył:	RockShox Deluxe Select R, DebonAir
Korba:	Bosch Gen4 w/ custom Ai offset, 34T
Pedały:	-
Przerzutka tylna:	SRAM SX Eagle
Manetki:	SRAM SX Eagle, 12-speed
Kaseta:	SRAM PG-1210, SX Eagle, 11-50, 12-speed
Łańcuch:	SRAM SX Eagle, 12-speed
Obřęcze p/t:	WTB ST i29 TCS, 32h, tubeless ready
Opony p/t:	(F) Maxxis Minion DHF, 27.5/29 x 2.6", 3C compound, EXO+, tubeless ready (R) Maxxis Minion DHR II, 27.5/29 x 2.6", 3C compound, EXO+, tubeless ready
Piasta p/t:	(F) Formula 15x110 (R) Formula DC-1248, 12x148
Szprychy:	DT Swiss Champion
Hamulce:	SRAM Guide RE hydro disc, 220/200mm Centerline rotors
Dźwignie hamulca:	SRAM Guide RE hydro disc
Kierownica:	Cannondale 3 Riser, 6061 Alloy, 15mm rise, 8° sweep, 4° rise, 780mm
	Cannondale 3, 3D Forged 6061 Alloy, 1-1/8", 31.8, 0-degree

Mostek:	
Chwyty:	Cannondale Locking Grips
Stery:	Integrated Sealed Bearing, Tapered
Siodło:	Fabric Scoop Shallow Sport, steel rails
Sztyca:	TranzX dropper, internal routing, 31.6, 80mm (XS), 100mm (S), 120mm (M), 130mm (L-XL)
Jednostka napędowa:	Bosch Performance Line CX 250W
Bateria:	Bosch PowerTube 625Wh
Wyświetlacz:	Bosch Purion
Ładowarka:	Bosch 4A

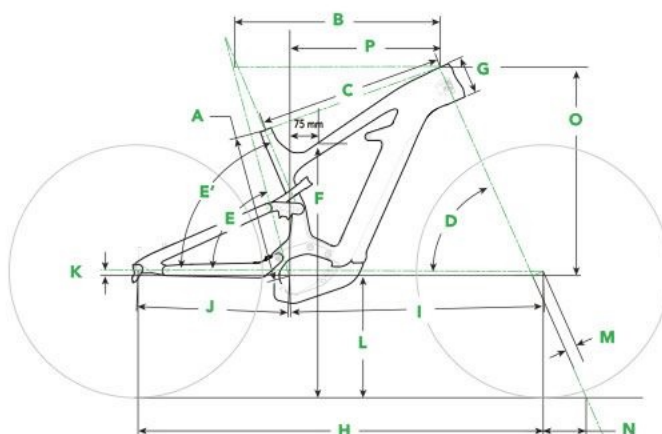

	SM	MD	LG	XL
A Seat Tube Length (cm)	41.0	44.0	47.0	51.5
B Top Tube Horizontal (cm)	58.7	61.4	63.8	66.6
C Top Tube Actual (cm)	52.2	55.2	57.8	61.2
D Head Tube Angle	66.0°	66.0°	66.0°	66.0°
E Seat Tube Angle				
E' Seat Tube Angle Effective	75.0°	75.0°	75.0°	75.0°
F Standover (cm)	73.9	74.9	75.5	77.8
G Head Tube Length (cm)	10.0	11.0	12.0	13.0
H Wheelbase (cm)	118.4	122.1	124.7	127.6
I Front Center (cm)	73.5	77.2	79.7	82.7
J Chain Stay Length (cm)	45.0	45.0	45.0	45.0
K Bottom Bracket Drop (cm)	1.0	1.8	1.8	1.8
L Bottom Bracket Height (cm)	35.1	36.2	36.2	36.2
M Fork Rake (cm)	4.4	5.1	5.1	5.1
N Trail (cm)	11.3	11.3	11.3	11.3
O Stack (cm)	58.5	61.9	62.9	63.8
P Reach (cm)	43.0	44.8	47.0	49.5

Produkt posiada dodatkowe opcje:

_Rozmiar ramy: XL , M , L , S